

# Mixers

## Analogue Mixers


### MPX-206/SW

Order No. 0202480




#### 6-channel stereo mixer

- 4 stereo input channels, each with separate LED level display, switchable line/phono (channels 1-2) and line/line (channels 3-4), gain control, 3-way equalizer with cut function
- 1 DJ microphone channel with switchable automatic talkover and 1 guest microphone channel, both channels with gain control as well as 2-way tone control
- 1 stereo effect way (send/return)
- 2 master outputs, each with beat LED and 1 booth output
- 1 record output
- LED level display, switchable between both master outputs
- Crossfader with assignment switches for channels 1-4 and cut switch function to suppress high frequencies, midrange and bass frequencies

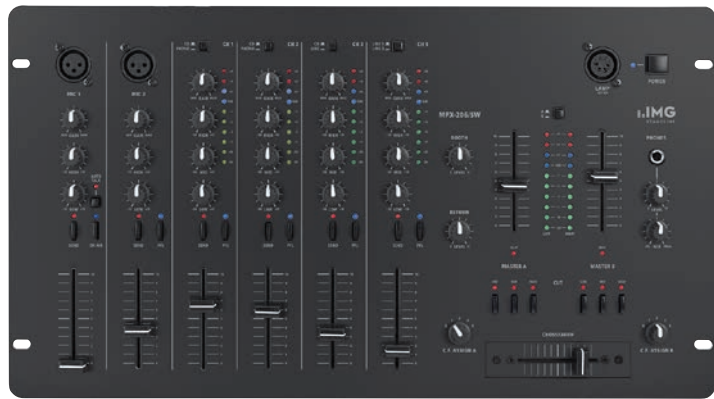

- Adjustable headphone output
- Fader start for the stereo inputs (channels 1-4)
- Connection for gooseneck light GNL-404

Model	MPX-206/SW
Mic input	1.5 mV, 2 x 6.3 mm jack
Line input	150 mV, 3 x RCA L/R
CD input	150 mV, 3 x RCA L/R
Phono input	3 mV, 2 x RCA L/R
Effect return	135 mV, 1 x RCA L/R
Master output	1 V/600 Ω, 1 x 3-pole XLR L/R
Record output	300 mV/600 Ω, 1 x RCA L/R
Monitor output	1 V/600 Ω, 1 x RCA L/R
Effect send	300 mV/600 Ω, 1 x RCA L/R
Headphones	≥ 8 Ω, 6.3 mm jack
Gooseneck lamp	12 V/5 W, 4-pole XLR
Frequency range	20-20,000 Hz
THD	0.05%
S/N ratio	> 50 dB
Equalizer bass	+15 dB, -30 dB/50 Hz
Equalizer midrange	+15 dB, -30 dB/1 kHz
Equalizer treble	+15 dB, -30 dB/10 kHz
Talkover	-12 dB, switchable
Power supply	~ 230 V/50 Hz/14 VA
Dimensions	482 x 266 x 110 mm, 6 RS
Weight	6.48 kg

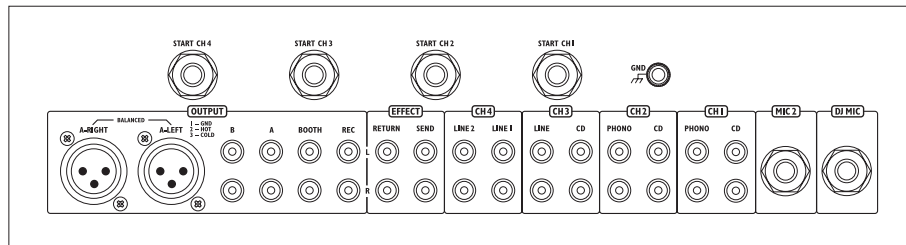

### MPX-205/SW

Order No. 0202190



#### Stereo DJ mixer

- 1 DJ mic, 4 stereo channels, switchable line/phono (1+2) and line/line (3+4)
- Stereo effect send/return
- 2 master outputs
- Automatic talkover and on-air switch for DJ mic
- LED level display, can be switched between the two master outputs and PFL
- 3-way equalizer with cut function for stereo channels
- 2-way tone control for DJ mic
- Gain control for each input
- Pre-fader listening (PFL) to the stereo inputs and outputs via adjustable headphone output
- Crossfader with assignment switches
- Connection for gooseneck light GNL-404



Model	MPX-205/SW
Mic input	1.5 mV, 1 x 6.3 mm jack
Line input	150 mV, 3 x RCA L/R
CD input	150 mV, 3 x RCA L/R
Phono input	3 mV, 2 x RCA L/R
Effect return	135 mV, 1 x RCA L/R
Master output	1 V/600 Ω, 1 x 3-pole XLR L/R
Record output	330 mV/600 Ω, 1 x RCA L/R
Monitor output	300 mV/600 Ω, 1 x RCA L/R
Effect send	1.2 V/600 Ω, 1 x RCA L/R
Headphones	≥ 8 Ω, 1 x 6.3 mm jack
Gooseneck lamp	12 V/5 W, 1 x 4-pole XLR
Frequency range	20-20,000 Hz
THD	0.05%
S/N ratio	> 50 dB
Equalizer bass	+15 dB, -30 dB/50 Hz
Equalizer midrange	+15 dB, -30 dB/1 kHz
Equalizer treble	+15 dB, -30 dB/10 kHz
Talkover	-12 dB, automatic
Power supply	~ 230 V/50 Hz/14 VA
Dimensions	482 x 222 x 110 mm, 5 RS
Weight	4.3 kg

