

MPX-30DMP

Order No. 0202760




Stereo DJ mixer with integrated MP3 player

Mixer:

- 3 input channels (5 stereo ways, 1 DJ microphone way)
 - Input channels, each with gain control, 3-way equalizer and cue button, with LED level display of the stereo master
 - Talkover function
 - Adjustable headphone output with pre-fader listening to the stereo input channels and the master output
 - Crossfader with switchable characteristic and reverse switch
 - Master output with stereo LED level display
 - Additional outputs booth and record
- MP3 player with USB interface and SD/MMC card slot:
- USB storage media can be connected directly (e.g. USB flash drive)
 - For SD/MMC cards up to 32 GB (FAT 6/FAT 32), available at option
 - Alphanumeric display
 - Repeat function
 - Blue backlit display

Model	MPX-30DMP
Mic input	1 mV, 1 x 3-pole XLR/6.3 mm jack
Line input	70 mV (line 1), 1 x RCA L/R 50 mV (line 2-3), 2 x RCA L/R
Phono input	2 mV (phono 1), 1 x RCA L/R 1 mV (phono 2-3), 2 x RCA L/R
Master output	1 V, 1 x 3-pole XLR L/R, bal. 580 mV, 1 x RCA L/R
Record output	200 mV, 1 x RCA L/R
Booth output	500 mV, 1 x RCA L/R
Headphones	≥ 8 Ω, stereo
Frequency range	20-20,000 Hz
THD	< 0.15%
S/N ratio	> 60 dB, unweighted
Equalizer bass	+12 dB, -32 dB/50 Hz
Equalizer midrange	+12 dB, -32 dB/1.2 kHz
Equalizer treble	+12 dB, -32 dB/10 kHz
Talkover	-16 dB
Power supply	~ 230 V/50 Hz/20 VA
Dimensions	245 x 315 x 120 mm
Weight	3 kg

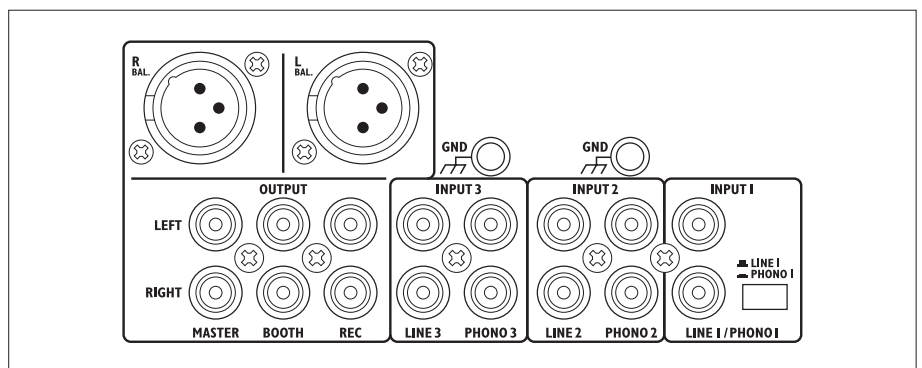

MPX-44/SW

Order No. 0202420



6-channel stereo DJ mixer, with black brushed aluminium front panel.

- 6 input channels (4 stereo ways, 2 microphone ways)
- Stereo input channels, switchable 2 x phono/line and 2 x line/line, with LED level display of the stereo master
- Input channels, each with gain control and 3-way equalizer, stereo input channels with cut function
- DJ mic with automatic talkover, PAD switch and on-air switch
- Mic with PAD switch and on-air switch
- Switches illuminate blue when activated
- Adjustable, crossfader-controlled headphone output with pre-fader listening (PFL) to the stereo input channels and mic
- Replaceable crossfader with assignment switches
- Especially easy-sliding high-quality faders
- Master output with stereo LED level display

- Additional outputs booth and zone
- Connection for gooseneck light GNL-204



Model	MPX-44/SW
Mic input	1.5 mV, 2 x 6.3 mm jack
Line input	150 mV, 5 x RCA L/R
CD input	150 mV, 1 x RCA L/R
Phono input	3 mV, 2 x RCA L/R
Master output	1 V/600 Ω, 1 x 3-pole XLR, 1 x RCA L/R
Record output	0.5 V/600 Ω, 1 x RCA L/R
Monitor output	1 V/600 Ω (zone), 1 x RCA L/R
Booth output	1 V/600Ω, 1 x RCA L/R
Headphones	≥ 8 Ω, 1 x 6.3 mm jack
Gooseneck lamp	12 V/0.75 W, 1 x BNC
Frequency range	20-20,000 Hz
THD	0.1%
S/N ratio	61 dB, unweighted
Equalizer bass	+12 dB, -12 dB/50 Hz (mic) +15 dB, -30 dB/50 Hz (channels 1-4)
Equalizer midrange	+12 dB, -12 dB/1 kHz (mic) +15 dB, -30 dB/1 kHz (channels 1-4)
Equalizer treble	+12 dB, -12 dB/10 kHz (mic) +15 dB, -30 dB/10 kHz (channels 1-4)
Talkover	-16 dB, automatic
Power supply	~ 230 V/50 Hz/20 VA
Dimensions	482 x 177 x 105 mm, 4 RS
Weight	3.6 kg

