


## LC-324DMX

Order No. 38.7720

**LED DMX controller**, for controlling all standard 3-channel to 8-channel LED spotlights.

- Operation with up to 4 LED spotlights, to be controlled individually or in combination
- Up to 8 DMX channels for each spotlight
- DMX channels for red, green, blue, white, master and strobe
- Channel sequence for red, green, blue, white, master and strobe can be patched
- 3 to 8 DMX channels can be selected for each spotlight
- Manual control via 6 faders

- Colour assignment directly via button for the colours: red, light red, orange, yellow, green, light green, cyan, white, blue, light blue, pink and purple
- 4 automatic programs
- Audio control via built-in microphone
- Buttons for blackout, full-on, fader and music control
- LED indication for each button
- Robust metal console housing
- Connections: 1 x 3-pole XLR (DMX out), 1 x low-voltage jack
- Power is provided via enclosed plug-in power supply
- Dimensions: 242 x 156 x 62 mm
- Weight: 1.5 kg

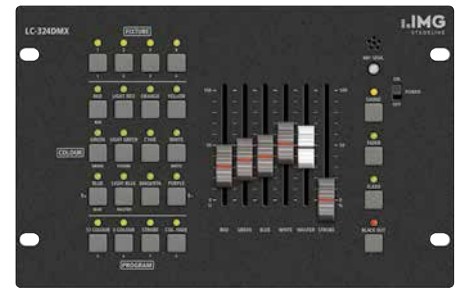

## LC-8PRO

Order No. 38.0010



**Professional RGB LED DMX controller**, for controlling all standard LED spotlights.

- User-friendly and simple operation
- For controlling 8 RGB LED spotlights or LED light effect units
- 8 DMX channels (e.g. red/green/blue/master or effect) can be controlled for each device
- 2 aux channels, e.g. for fog machines or stroboscopes
- Sequence of RGB function and master function can be selected as desired for each device, for 8 DMX channels (channels can be patched), reserves 66 DMX channels
- Editable channel labels

- 16 scenes can be programmed
- 16 chases (sequences) with a total of 1,740 steps max., 1,740 steps max. per chase
- Fade and speed of the chases can be adjusted separately
- Music-controlled via audio input with adjustable sensitivity
- 2 aux buttons for DMX control functions (e.g. fog machines)
- MIDI control
- Switchable DMX polarity
- Illuminated LCDs
- Robust metal housing



- Connections: 1 x 3-pole XLR (DMX out), 3 x 5-pole DIN (MIDI in/MIDI out/ MIDI thru), 1 x RCA (audio in), 1 x USB Type-A jack for optional LED gooseneck light, 1 x low-voltage jack
- Power is provided via enclosed plug-in power supply
- Dimensions: 482 x 156 x 75 mm
- Weight: 3.1 kg

## LC-8LED

Order No. 38.5500



**Professional RGB LED DMX controller**, for controlling all standard 4-channel to 8-channel LED spotlights.

- User-friendly and simple operation
- For controlling 8 RGB LED spotlights or LED light effect units
- 8 of 16 DMX channels (e.g. red/green/blue/master or effect) can be controlled for each device
- Sequence of RGB function and master function can be selected as desired for each device, for 8 of 16 DMX channels (channels can be patched), reserves 128 DMX channels
- 16 scenes can be programmed

- 16 chases (sequences) with a total of 1,740 steps max., 1,740 steps max. per chase
- Fade and speed of the chases can be adjusted separately
- Music-controlled via audio input with adjustable sensitivity
- 2 aux buttons for DMX control functions (e.g. fog machines)
- MIDI control
- Switchable DMX polarity
- LCD
- Robust metal housing



- Connections: 1 x 3-pole XLR (DMX out), 3 x 5-pole DIN (MIDI in/MIDI out/ MIDI thru), 1 x RCA (audio in), 1 x USB Type-A jack for optional LED gooseneck light, 1 x low-voltage jack
- Power is provided via enclosed plug-in power supply
- Dimensions: 482 x 156 x 75 mm
- Weight: 2.5 kg

## LC-4LED

Order No. 38.0160

**Professional RGB LED DMX controller**, for controlling all standard 4-channel LED spotlights.

- User-friendly and simple operation
- 4 RGB LED spotlights or LED light effect units can be controlled
- 4 of 8 DMX channels (red/green/blue/master or effect) can be controlled for each device
- Sequence of RGB function and master function can be selected as desired for each device, for 4 of 8 DMX channels (channels can be patched), reserves 32 DMX channels
- 16 scenes can be programmed

- 16 chases (sequences) with a total of 392 steps max., 99 steps max. per chase
- Fade and speed of the chases can be adjusted separately
- Strobe function
- Music-controlled via integrated microphone
- Switchable DMX polarity
- LED display
- Robust metal desktop console housing
- Connections: 1 x 3-pole XLR, 1 x low-voltage jack
- Power is provided via enclosed plug-in power supply



- Dimensions: 372 x 156 x 58 mm
- Weight: 1.7 kg