TXS-811SET

Order No. 25.3630

Multifrequency microphone system, with UHF PLL technology.

- 1 hand-held microphone transmitter (cardioid polar pattern), 1 receiver, 1 plug-in power supply
- Switching diversity system
- 9 selectable UHF channels
- Volume and squelch controls
- 482 mm (19") rack installation of 2 receiver units possible with supplied mounting brackets

Licence-free in the EU.

Model	TXS-811SET
Carrier frequency range	863-865 MHz
Audio frequency range	50-15,000 Hz
THD	< 1%
Dynamic range	> 100 dB
RF S/N ratio	> 90 dB
Transmitting power	< 10 mW
Operating range	approx. 30 m
Power supply transmitter	2 x 1.5 V batt. AA size
Dimensions transmitter	Ø 48 mm x 235 mm
Weight transmitter	165 g
Audio signal receiver	50 mV/10 kΩ (jack) 100 mV/10 kΩ (XLR, bal.)
Power supply receiver	via encl. plug-in power supply
Dimensions receiver	200 x 45 x 130 mm
Weight receiver	370 g
Connections receiver	1 x XLR, bal., 1 x 6.3 mm jack, unbal.

TXS-812SET

863.80 MHz 864.20 MHz

Order No. 25.2600

Wireless 2-channel microphone system

- 2 microphone transmitters, 1 receiver, 1 plug-in power supply
- Two-channel UHF version (non-diversity) with channel mixing function which can additionally be selected
- Volume and squelch controls for each channel
- Each channel with LEDs for indicating RF signal and audio signal

Licence-free in the EU.

Model	TXS-812SET
Carrier frequency range	863.80 MHz , 864.20 MHz
Audio frequency range	40-15,000 Hz
THD	< 0.5%
Dynamic range	> 90 dB
RF S/N ratio	> 80 dB
Transmitting power	< 10 mW
Operating range	approx. 30 m
Power supply transmitter	2 x 1.5 V batt. AA size (not supplied)
Dimensions transmitter	Ø 52 mm x 260 mm
Weight transmitter	240 g
Audio signal receiver	0-200 mV/10 kΩ (jack) 0-400 mV/10 kΩ (XLR, bal.)
Power supply receiver	via encl. plug-in power supply
Dimensions receiver	210 x 46 x 190 mm
Weight receiver	560 g
Connections receiver	2 x XLR, bal. 1 x 6.3 mm jack, unbal.

TXS-813SX

863.80 MHz

Order No. 25.3160

Pocket transmitter

Matching the wireless 2-channel microphone system TXS-812SET.

- Headband microphone and tie clip microphone, each with latchable 3.5 mm plug
- Volume control
- Belt clip
- Power LED
- Power supply via 2 x 1.5 V battery AA size (not supplied)
- Transmitting power: < 10 mW (EIRP)
- Operating range: approx. 30 m

Model	TXS-813SX
Carrier frequency range	863.80 MHz
Audio frequency range	50-15,000 Hz
Transmitting power	< 10 mW
Operating range	approx. 30 m
Power supply transmitter	2 x 1.5 V batt. AA size
Dimensions transmitter	65 x 145 x 25 mm
Weight transmitter	140 g
Connections transmitter	1 x 3.5 mm jack

Licence-free in the EU.

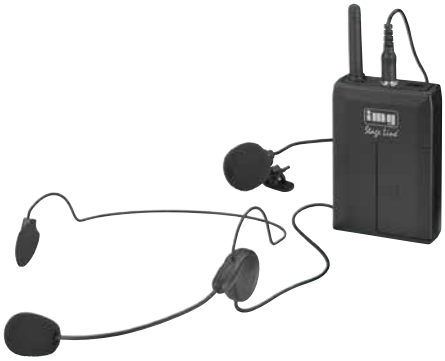

TXS-814SX

864.20 MHz

Order No. 25.3170

Pocket transmitter

Matching the wireless 2-channel microphone system TXS-812SET.

- Headband microphone and tie clip microphone, each with latchable 3.5 mm plug
- Volume control
- Belt clip
- Power LED
- Power supply via 2 x 1.5 V battery AA size (not supplied)
- Transmitting power: < 10 mW (EIRP)
- Operating range: approx. 30 m

Model	TXS-814SX
Carrier frequency range	864.20 MHz
Audio frequency range	50-15,000 Hz
Transmitting power	< 10 mW
Operating range	approx. 30 m
Power supply transmitter	2 x 1.5 V batt. AA size
Dimensions transmitter	65 x 145 x 25 mm
Weight transmitter	140 g
Connections transmitter	1 x 3.5 mm jack
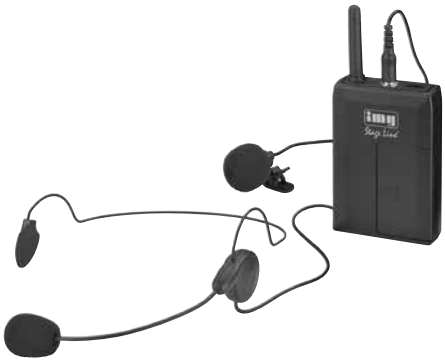
Licence-free in the EU.