



**MCL-204**

Order No. 25.2170




**2-channel compressor/limiter**, with noise gate and side chain input.

For each channel, including:

- 8-step LED level display, switchable to input signal or output signal
- 12-step attenuation display
- LED indicators for a perfect adjustment of the threshold values for expander/gate, compressor and limiter

- Servo-balanced inputs and outputs
- Bypass switch (hard bypass)
- Switch for hard or soft compression (hard/soft knee)

Model	MCL-204
Frequency range	20-20,000 Hz
Input signal	8.7 V 12.3 V (side chain)
Output signal	8.7 V
Output impedance	60 Ω bal, 30 Ω unbal.
Compression	1:1 to ∞:1
Gate ratio	1:1.2 to 1:8
S/N ratio	> 90 dB
Channel separation	> 100 dB
THD	< 0.05%
Power supply	~ 230 V/50 Hz/20 VA
Dimensions	482 x 44 x 220 mm, 1 RS
Weight	3 kg

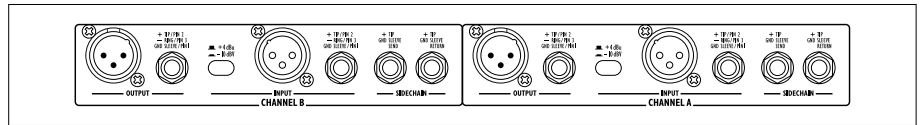

**DEQ-230**

Order No. 25.4500




**Digital parametric/graphic 2 x 30 band stereo equalizer**

- 2 inputs and 2 outputs (XLR, balanced)
- S/PDIF digital input stereo
- Dynamic range: > 110 dB
- User-defined routing of the inputs to the outputs
- Graphic user interface, PC editing software
- 24 user presets can be stored
- Remote control via USB, RS-485

- Dot matrix display with 2 x 20 characters
- VU meter with 7 LEDs for each channel, optionally for level display or limiter

Model	DEQ-230
Frequency range	20-20,000 Hz
S/N ratio	> 110 dB
THD	< 0.005%
Power supply	~ 230V/50Hz/20 VA
Dimensions	482 x 44 x 230 mm, 1 RS
Weight	2.9 kg

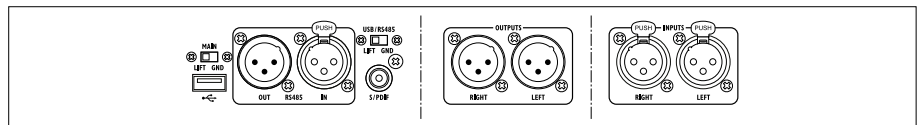

**MEQ-115/SW**

Order No. 24.4350




**Graphic equalizer**

- 2-channel version, 2 x 15 frequency controls in 2/3 octave steps
- Switchable control range  $\pm 6/\pm 12$  dB
- Peak LED
- Switchable low cut filter
- Master volume control
- Bypass switch and ground lift switch

- Frequency controls with centre click
- Inputs and outputs each via 2 x XLR and 2 x 6.3 mm jack

Model	MEQ-115/SW
Frequency range	20-20,000 Hz
Control range	switchable $\pm 6/\pm 12$ dB
Control frequencies	2 x 25/40/63/100/160/250/400/630 Hz/ 1/1.6/2.5/4/6.3/10/16 kHz
Input signal	0.775 V
Input impedance	50 kΩ
Output signal	0.775 V
Output impedance	600 Ω
Low cut	20 Hz/-3 dB
S/N ratio	66 dB
THD	< 0.1%
Power supply	~ 230 V/50 Hz/10 VA
Dimensions	482 x 44.5 x 165 mm, 1 RS
Weight	2.5 kg

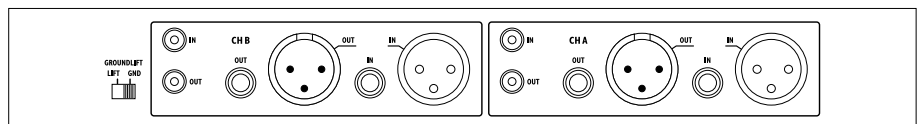

**VU-800/SW**

Order No. 20.2250



**Audio dB display**

- 3-colour LED display with 40 LEDs
- Switchable display mode (dot display or bar graph display)

- Input level control for each channel
- 482 mm (19") rack installation, 1 RS
- Power is provided via enclosed plug-in power supply

Model	VU-800/SW
Display	-45 dB to +12 dB
Power supply	via encl. power supply
Dimensions	482 x 45 x 50 mm
Weight	795 g
Power supply	1 x low-voltage jack
Input, stereo	1 x RCA L/R
Output, stereo	1 x RCA L/R