

MMX-11USB

Order No. 0202840



2-channel miniature audio mixer, with 3 inputs and USB interface.

- Integrated USB audio interface (will be identified and addressed as an external sound card)
- Full-duplex USB port (allows for simultaneous recording and reproduction) for reproduction of digital audio data from a PC and for recording mixings onto a PC
- 1 mono input channel with gain control, 2-way equalizer and pan pot, peak LED
- 1 stereo input channel with level control, 2-way equalizer and balance control
- Tape record/play connections
- 1 x 3.5 mm stereo output (master)
- Adjustable headphone output
- +20 V phantom power, permanent
- Clip LED
- Robust metal housing of compact size



Model	MMX-11USB
Mic input	0.5 mV, 1 x 3-pole XLR
Line input	150 mV (stereo), 1 x RCA L/R 2 mV (mono), 6.3 mm jack
Tape (play)	420 mV, 1 x RCA L/R
Master output	6 V max., 1 x 3.5 mm jack
Booth output	6 V max., 1 x 3.5 mm jack
Tape (rec)	1 x RCA L/R
Frequency range	20-20,000 Hz
THD	< 0.05%
S/N ratio	81 dB, weighted
Equalizer bass	±15 dB/80 Hz
Equalizer treble	±15 dB/12 kHz
Power supply	via USB interface or via encl. power supply
Dimensions	102 x 45 x 140 mm
Weight	430 g



MPX-410DMP

Order No. 0202850




Stereo DJ mixer with integrated MP3 player and Bluetooth receiver

Mixer:

- 4 stereo input channels, switchable MP3/phono/line (channel 1), aux/phono/line (channel 2) and aux/mic/line (channels 3-4)
- Input channels, each with gain control and 2-way tone control
- 1 DJ microphone channel, adjustable, with 2-way tone control
- Adjustable headphone output with pre-fader listening (PFL) to the stereo input channels and the master output
- Crossfader with assignment switches
- Master output with stereo LED level display
- Additional outputs booth and record

MP3 player with Bluetooth receiver, USB interface and SD/MMC card slot:

- Bluetooth receiver for wireless connection of laptops, smartphones or tablet PCs
- USB storage media can be connected directly (e.g. USB flash drive)
- For SD/MMC cards up to 32 GB (FAT16/FAT32), available at option
- Alphanumeric display
- Repeat function
- Blue backlit display

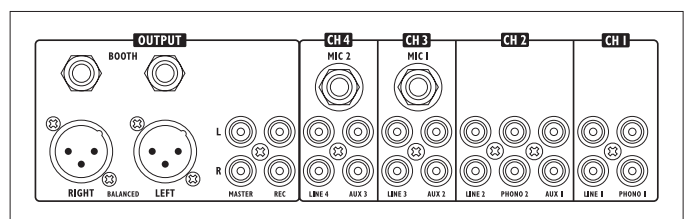

Model	MPX-410DMP
Mic input	1.5 mV, 3 x 6.3 mm jack
Line input	200 mV, 4 x RCA L/R
Phono input	2 mV, 2 x RCA L/R
Aux input	200 mV, 3 x RCA L/R
Master output	1 V, 1 x 3-pole XLR (bal) 1 x RCA L/R
Record output	400 mV, 1 x RCA L/R
Booth output	1 V, 1 x 6.3 mm jack L/R
Headphones	≥ 8 Ω, 1 x 6.3 mm jack
Bluetooth	yes
Frequency range	20-20,000 Hz
THD	< 0.15%
S/N ratio	> 60 dB, unweighted
Equalizer bass	±15 dB/50 Hz (channels 1-4) ±12 dB/100 Hz (DJ mic)
Equalizer treble	±15 dB/10 kHz (channels 1-4) ±12 dB/7 kHz (DJ mic)
Power supply	~ 230 V/50 Hz/15 VA
Dimensions	482 x 88 x 125 mm, 2 RS
Weight	2.9 kg