


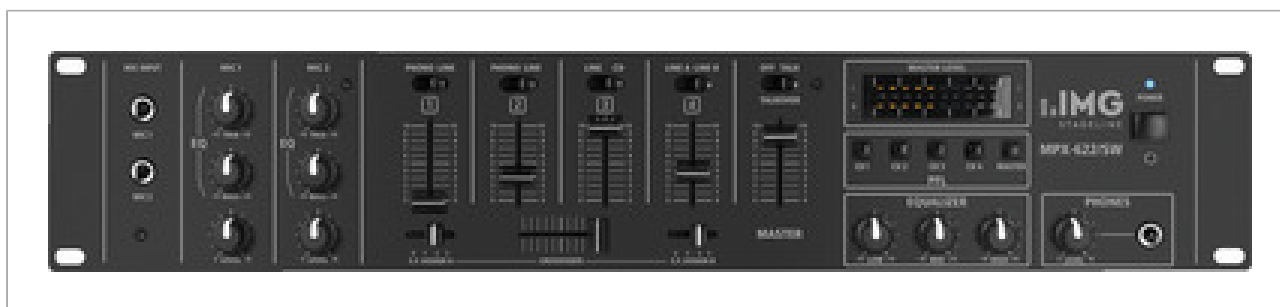

MPX-622/SW

Order No.: 0202210

PRODUCTINFOS

6-channel stereo audio mixer,

specifically for PA and DJ applications.

- 2 mono microphone channels with talkover switch and 2-way tone control
- 4 stereo input channels, switchable phono/line (channels 1 and 2) or line/line (channels 3 and 4)
- 1 stereo master output
- 1 stereo record output, independent of the master
- 3-way equalizer with centre click for master output and record output
- Pre-fader listening to each stereo input channel and the master output via adjustable stereo headphone output
- Switchable crossfader for crossfading between channels 1-4, any assignment possible
- Stereo LED level display

TECHNICAL SPECIFICATIONS

MPX-622/SW

No. of channels	6
No. of inputs	8
Mic input	1 mV, 2 x 6.3 mm jack
Line input	150 mV, 5 x RCA L/R
CD input	150 mV, 1 x RCA L/R
Phono input	3 mV, 2 x RCA L/R
Master output	0.775 V/600 Ω , 1 x RCA L/R

MPX-622/SW

Record output	0.775 V/600 Ω , 1 x RCA L/R
Headphones	$\geq 8 \Omega$, 1 x 6.3 mm jack
Frequency range	20-20,000 Hz
THD	0.1%
S/N ratio	65 dB
Equalizer bass	± 10 dB/100 Hz
Equalizer midrange	± 10 dB/1 kHz
Equalizer treble	± 10 dB/10 kHz
Talkover	-15 dB
Crossfader	yes
Power supply	~ 230 V/50 Hz/10 VA
Mains voltage	~ 230 V
Mains frequency	50 Hz
Power consumption, operation	10 VA
Admiss. ambient temp.	0-40 °C
Dimensions	482 x 89 x 95 mm, 2 RS
Width	482 mm
Height	89 mm
Depth	95 mm
Rack units, RU	2
Weight	2.4 kg
Packing dimensions (W x H x L)	0.12 x 0.155 x 0.56 m
Gross weight	3.18 kg
Net weight	2.47 kg